


Ninja



SUNRISE 

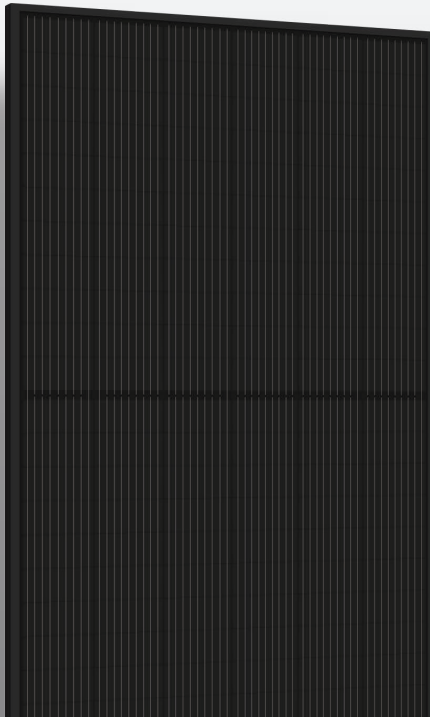

Ninja Series
Large Dimension Half Cell Full Black
Mono Solar Module

SR-M666HL
335~350W

SR-M666335HL
SR-M666340HL
SR-M666345HL
SR-M666350HL

IEC61215/IEC61730

ISO9001:Quality Management System ISO14001:Environmental Management System

ISO45001:Occupational Health and Safety Management System



PID Resistance



Higher Power Output



9 Bus Bar Half Cut Cell
With PERC Technology



Strengthened Mechanical
Support 5400 Pa Snow
Load, 2400 Pa Wind Load




0~3% Positive Tolerance



Combined With The Roof
For A Better Visual
Appearance

Additional value from SUNRISE linear warranty

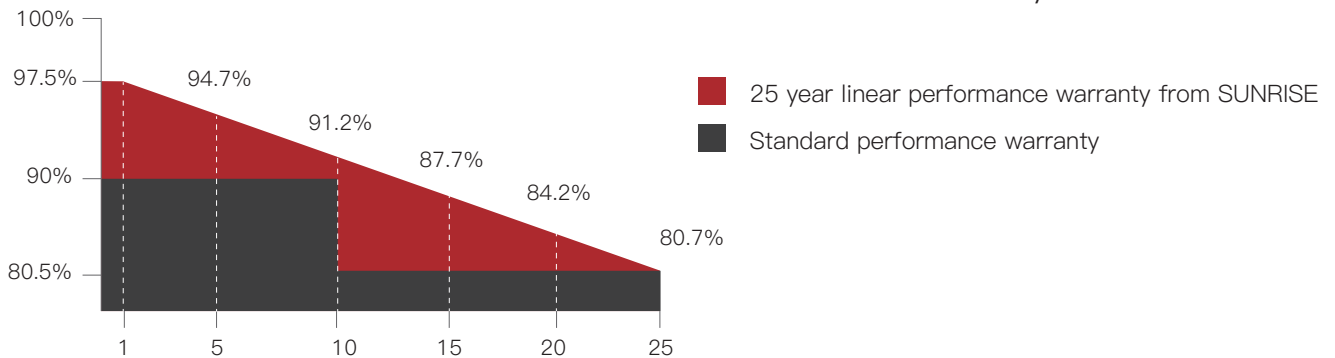

SUNRISE ENERGY CO., LTD

TEL:+86-519-81688389

Web:www.sunriseenergy.cn

E-mail:info@sunriseenergy.cn

ADD:No.20 Tongzi River West Road, Zhonglou Development Zone, Changzhou, Jiangsu




Module Type		SR - M666335HL		SR - M666340HL		SR - M666345HL		SR - M666350HL	
Test Environment		STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT
Tolerance	(%)	0~+3		0~+3		0~+3		0~+3	
Module Efficiency	(%)	18.12		18.39		18.66		18.93	
Maximum Power	Pmax(W)	335	250.27	340	254	345	257.74	350	261.47
Open Circuit Voltage	Voc(V)	43.45	40.22	43.67	40.42	43.89	40.62	44.11	40.83
Short Circuit Current	Isc(A)	9.94	8.39	10.04	8.48	10.13	8.55	10.23	8.64
Maximum Power Voltage	Vm(V)	35.58	33.48	35.76	33.65	35.94	33.81	36.12	33.98
Maximum Power Current	Im(A)	9.42	7.47	9.51	7.54	9.6	7.61	9.69	7.69
Cell Type	(mm)	158.75×79.375(9BB Mono-Crystalline Silicon)							
Number of Cells	(Pcs)	132(6×22)							
Maximum System Voltage	(V)	DC1000							
Temp. Coeff. of Voc	(%/°C)	-0.282							
Temp. Coeff. of Isc	(%/°C)	0.041							
Temp. Coeff. of Pm	(%/°C)	-0.387							
Operating Temperature	°C	-40 to 85							
Nominal Operating Cell Temperature (NOCT)	°C	45±2							
Max. Series Fuse	(A)	15							
Pressure Bearing	(Pa)	5400							
Wind Bearing	(Pa)	2400							

STC: Irradiance 1000W/m², Cell temperature 25°C, AM1.5

NOCT: Irradiance 800W/m², Ambient temperature 20°C, Wind speed 1m/s

ENGINEERING DRAWINGS

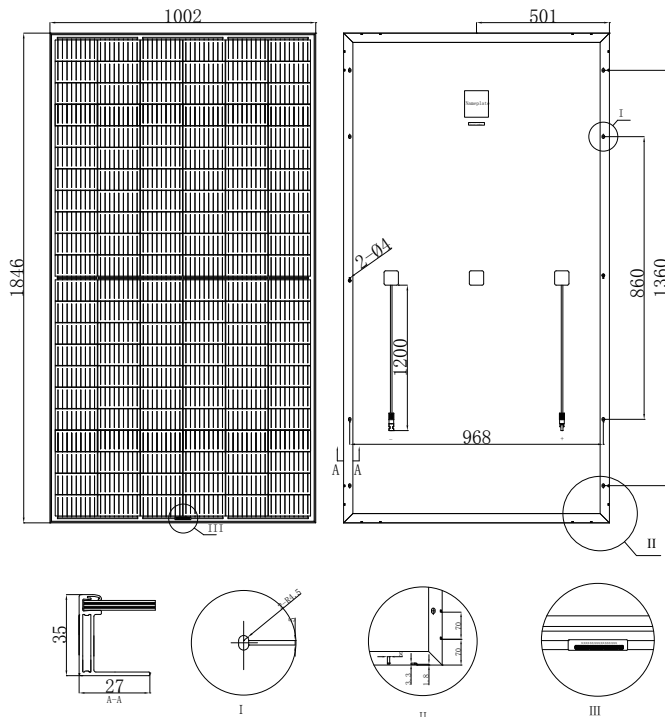


Manufactured in China


MATERIAL DETAILS

Frame	Anodized aluminum
Glass	3.2mm low-iron tempered suede glass
Cell	6×22pcs 158.75×79.375mm mono solar cell
Junction Box	Rated Current ≥15A, IP≥67, TÜV & UL
Cable&Connector	4mm ² , MC4 or MC4 compatible
Cable length	1200mm or as customer's requirements

IV CURVES

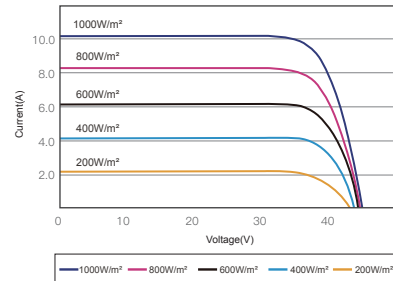

I-V CURVES OF PV MODULE(345W)

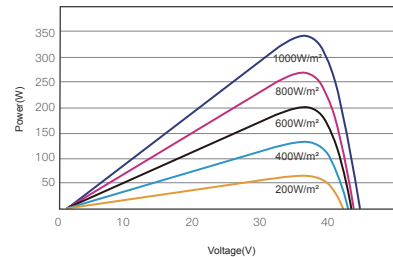

P-V CURVES OF PV MODULE(345W)

PACKING DETAILS

Dimension	(mm)	1846×1002×35
Weight	(kg)	20.3
Loading Capacity		792 pcs/40'HC
Packing	pcs/pallet	30